




SHOW.
EVENT.
STAGE.

SHOWFLOOR



your local partner:



Graboplast Floor Covering Manufacturers Ltd.
H-9023 Győr, 16/b. Fehérvári út.
Phone: (+36) 96 506-358
www.graboplast.hu

BY




GRABOPLAST

UNIFLOOR

Total thickness	mm	2,0
Total weight	kg/m ²	1,3
Length of roll	m	25
Width of roll	m	2



- A Wear layer
- B Glass fibre reinforcement
- C Foam back layer




EXPO

Total thickness	mm	1,5
Total weight	kg/m ²	1,75
Length of roll	m	20
Width of roll	m	2



- A PUR treatment
- B Homogeneous layer




LAS VEGAS LUX

Total thickness	mm	2,0
Total weight	kg/m ²	1,3
Length of roll	m	25
Width of roll	m	1,5



- A Wear layer
- B Glass fibre reinforcement
- C Foam back layer




ACOUSTIC 43 UNI

Total thickness	mm	3,2
Total weight	kg/m ²	2,7
Length of roll	m	25
Width of roll	m	2



- A Wear layer
- B Design
- C Medium layer
- D Glass fibre reinforcement
- E Foam back layer




DUETT

Total thickness	mm	1,4
Total weight	kg/m ²	1,7
Length of roll	m	20
Width of roll	m	2



- A Wear layer
- B Glass fibre reinforcement
- C Wear layer




BROADWAY 17

Total thickness	mm	1,7
Total weight	kg/m ²	2,1
Length of roll	m	20
Width of roll	m	2



- A Wear layer
- B Glass fibre reinforcement
- C Wear layer

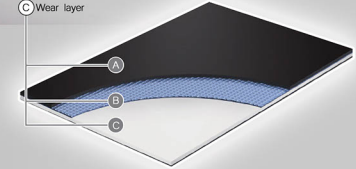


BROADWAY 20

Total thickness	mm	2,0
Total weight	kg/m ²	2,7
Length of roll	m	20
Width of roll	m	2



- A Wear layer
- B Compact layer
- C Glass fibre reinforcement
- D Compact back layer

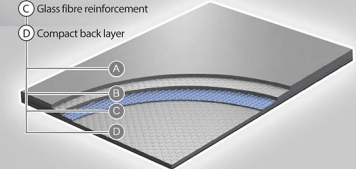


EVIDANCE 25

Total thickness	mm	2,5
Total weight	kg/m ²	3,5
Length of roll	m	20
Width of roll	m	2



- A Wear layer
- B Compact layer
- C Glass fibre reinforcement
- D Foam back layer

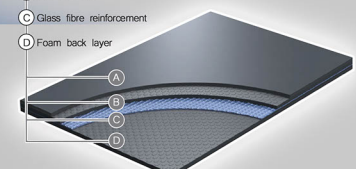


EVIDANCE 60

Total thickness	mm	6,0
Total weight	kg/m ²	3,4
Length of roll	m	15
Width of roll	m	2



- A Wear layer
- B Compact layer
- C Glass fibre reinforcement
- D Foam back layer

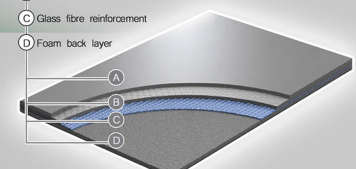

www.graboplast.hu





CMYK

UNIFLOOR

Multifunctional, decorative floor and wall covering for temporary and permanent usage.

PRODUCT BENEFITS:

- 26 colors
- 0,35 mm wear layer
- foam backing - foot comfort
- glass fiber reinforcement - dimensional stability
- surface protection - easy care

RECOMMENDED APPLICATION AREAS:

▷ DANCES

- ▷ BALLET ▷ CONTEMPORARY ▷ JAZZ ▷ AEROBIC
- ▷ FLAMENCO ▷ DANCE-HALLS ▷ MULTI-DANCE
- ▷ WARM-UP ROOMS ▷ DANCE STUDIOS


▷ ENTERTAINMENT

- ▷ STAGES ▷ CATWALKS ▷ THEATRES ▷ CINEMAS
- ▷ CONCERTS ▷ TOURS ▷ TV STUDIOS ▷ RECORD STUDIOS
- ▷ SHOWS ▷ NIGHTLIFE ▷ CASINOS ▷ BARS ▷ NIGHT CLUBS
- ▷ DISCOS

▷ CULTURAL EVENTS

- ▷ BALLS ▷ PARTIES ▷ EXHIBITIONS ▷ TRADE FAIRS
- ▷ SHOWROOMS ▷ SALONS ▷ WEDDINGS ▷ WALL COVERING

COLORS

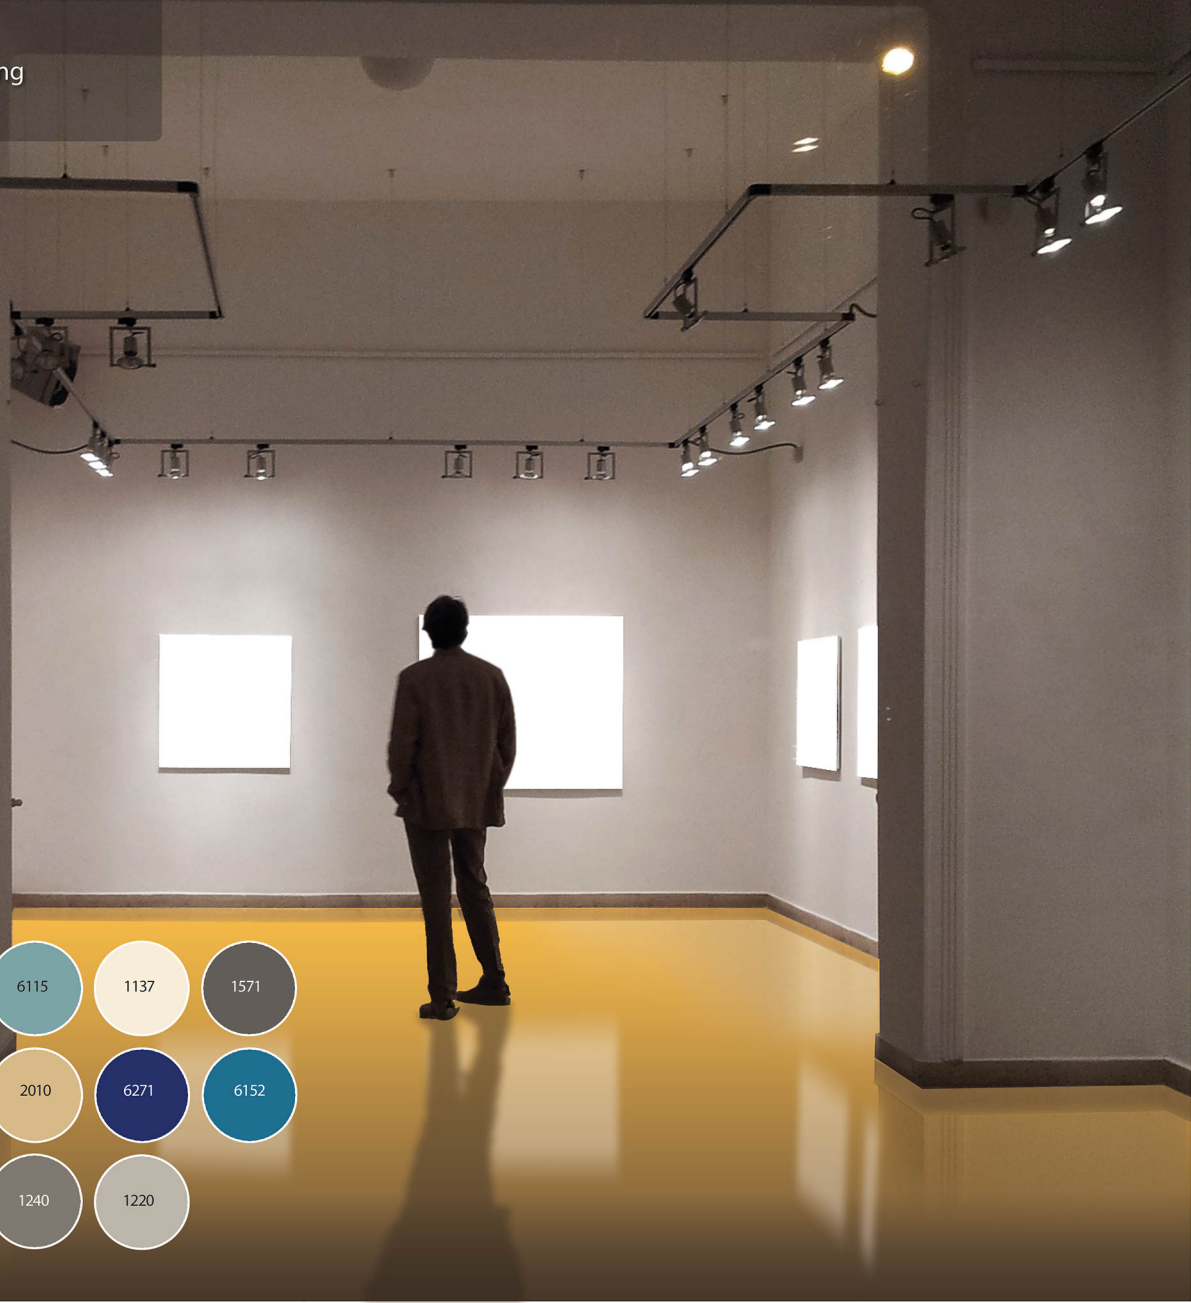

UNIFLOOR

UNIFLOOR





CMYK

EXPO

Durable show floor with glittering design

PRODUCT BENEFITS:

- extremely cost effective
- reversible
- dimensionally stable
- easy care
- for permanent or temporary installations

RECOMMENDED APPLICATION AREAS:

- ▷ TRADE SHOWS
- ▷ EXHIBITIONS
- ▷ STAGES
- ▷ PROTECTIVE COVERING
- ▷ CONSTRUCTION AREAS
- ▷ SMALL BUSINESS AREAS

COLORS

GALAXY

EXPO



SOLVENT FREE

PORTABLE PERMANENT



EXPO



CMYK

LAS VEGAS LUX

LAS VEGAS LUX

Unique mirrorlike shiny finish for floor and wall decoration


PRODUCT BENEFITS:

- unique, glossy, mirrorlike finish
- glass fiber reinforcement - dimensional stability
- surface protection - easy care
- wide color range

RECOMMENDED APPLICATION AREAS:

- ▶ **ENTERTAINMENT**
 - ▷ STAGES ▷ CATWALKS ▷ DRAMA ▷ TOUR
 - ▷ TV STUDIOS ▷ EVENTS ▷ SHOWS
- ▶ **CULTURAL EVENTS**
 - ▷ EXHIBITIONS ▷ WEDDINGS

COLORS



LAS VEGAS LUX

SOLVENT FREE

GLASS FIBER REINFORCED

CLIP SYSTEM

PORTABLE

1.5m x 25m

ACOUSTIC 43

Heavy duty object floor with acoustical and decorative benefits


PRODUCT BENEFITS:

- 0,7 mm wear layer - very high durability
- 19 db noise reduction
- glass fiber reinforcement - dimensional stability
- surface protection - easy care
- foam backing - foot comfort
- wide color range

RECOMMENDED APPLICATION AREAS:

- ▷ **DANCES**
 - ▷ CONTEMPORARY ▷ JAZZ
- ▷ **ENTERTAINMENT**
 - ▷ TV STUDIOS ▷ MUSIC STUDIOS ▷ RADIO STUDIOS
 - ▷ EVENTS ▷ SHOWS ▷ STAGES ▷ CATWALKS
- ▷ **CULTURAL EVENTS**
 - ▷ EXHIBITIONS
 - ▷ ANYWHERE WHERE ACOUSTICAL CHARACTERISTIC IS AN ISSUE

COLORS

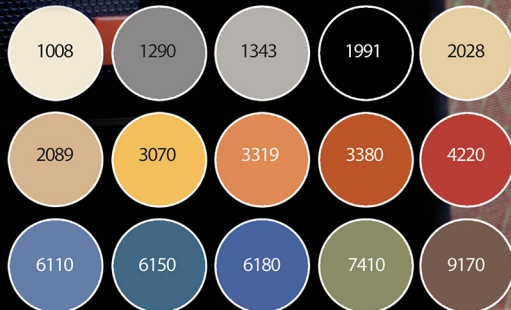



CMYK

GRABO DUETT

Double sided floor for permanent and temporary installation

PRODUCT BENEFITS:

- solid PVC
- glass fiber reinforcement - dimensional stability
- wide color range
- surface protection - easy care

RECOMMENDED APPLICATION AREAS:

▷ DANCES

- ▷ BALLET ▷ CONTEMPORARY ▷ JAZZ ▷ AEROBIC
- ▷ FLAMENCO ▷ DANCE-HALLS ▷ MULTI-DANCE
- ▷ WARM-UP ROOMS ▷ DANCE STUDIOS


▷ ENTERTAINMENT

- ▷ STAGES ▷ CATWALKS ▷ THEATRES ▷ CINEMAS ▷ CONCERTS
- ▷ TOURS ▷ TV STUDIOS ▷ RECORD STUDIOS ▷ SHOWS

▷ CULTURAL EVENTS

- ▷ BALLS ▷ PARTIES ▷ EXHIBITIONS ▷ TRADE FAIRS
- ▷ SHOWROOMS ▷ SALONS ▷ WEDDINGS

COLORS



GRABO DUETT

GRABO DUETT





CMYK

BROADWAY 17

Professional double sided ballet floor for permanent or temporary installation

PRODUCT BENEFITS:

- solid PVC
- glass fiber reinforcement - dimensional stability
- wide color range
- surface protection - easy care

RECOMMENDED APPLICATION AREAS:

- ▶ **DANCES**
 - ▷ BALLET ▷ CONTEMPORARY ▷ JAZZ ▷ AEROBIC
 - ▷ FLAMENCO ▷ DANCE-HALLS ▷ MULTI-DANCE
 - ▷ WARM-UP ROOMS ▷ DANCE STUDIOS
- ▶ **ENTERTAINMENT**
 - ▷ STAGES ▷ DRAMA ▷ THEATRES ▷ CINEMAS
 - ▷ CONCERTS ▷ TOURS
 - ▷ TV STUDIOS ▷ RECORD STUDIOS ▷ SHOWS
- ▶ **CULTURAL EVENTS**
 - ▷ SHOWS (AS A PROTECTING COVER)

COLORS



BROADWAY 17

BROADWAY 17

SOLVENT FREE

GLASS FIBER REINFORCED

CLIP SYSTEM

PORTABLE PERMANENT

2m x 20m



CMYK

BROADWAY 20

One sided dance floor with wide application area

PRODUCT BENEFITS:

- hard wearing floor covering with an embossed, non-slip surface,
- its structure and top layer allow the use for many types of dances
- it can be installed with hot or cold welding,
- due to glass fiber reinforcement it is dimension-stable
- foam backing

RECOMMENDED APPLICATION AREAS:

▷ DANCES

- ▷ BALLET ▷ CONTEMPORARY ▷ JAZZ ▷ AEROBIC
- ▷ FLAMENCO ▷ DANCE-HALLS ▷ MULTI-DANCE
- ▷ WARM-UP ROOMS ▷ DANCE STUDIOS


▷ ENTERTAINMENT

- ▷ STAGES ▷ CATWALKS ▷ THEATRES ▷ CINEMAS
- ▷ CONCERTS ▷ TOURS ▷ TV STUDIOS ▷ RECORD STUDIOS
- ▷ SHOWS ▷ NIGHTLIFE ▷ CASINOS ▷ BARS
- ▷ NIGHT CLUBS ▷ DISCOS

▷ CULTURAL EVENTS

- ▷ BALLS ▷ PARTIES ▷ EXHIBITIONS ▷ TRADE FAIRS
- ▷ SHOWROOMS ▷ SALONS ▷ WEDDINGS

COLORS



BROADWAY 20

SOLVENT FREE

GLASS FIBER REINFORCED

CLIP SYSTEM

PORTABLE PERMANENT

2m x 20m

BROADWAY 20



CMYK

EVIDANCE 25

Multiuse dance floor for temporary and permanent usage

PRODUCT BENEFITS:

- non slip embossed surface
- 1,8mm foam backing - high level of joint protection
- glass fiber reinforcement - dimensional stability
- surface protection - easy care

RECOMMENDED APPLICATION AREAS:

▷ DANCES

- ▷ BALLET ▷ CONTEMPORARY ▷ JAZZ ▷ AEROBIC ▷ FLAMENCO
- ▷ DANCE-HALLS ▷ MULTI-DANCE ▷ WARM-UP ROOMS
- ▷ DANCE STUDIOS

▷ ENTERTAINMENT

- ▷ STAGES ▷ CATWALKS ▷ THEATRES ▷ CINEMAS ▷ CONCERTS
- ▷ TOURS ▷ TV STUDIOS ▷ RECORD STUDIOS ▷ SHOWS
- ▷ NIGHTLIFE ▷ CASINOS ▷ BARS ▷ NIGHT CLUBS ▷ DISCOS

▷ CULTURAL EVENTS

- ▷ BALLS ▷ PARTIES ▷ SHOWROOMS

COLORS



EVIDANCE 25

EVIDANCE 25

SOLVENT FREE

GLASS FIBER REINFORCED

CLIP SYSTEM

PERMANENT

2m x 20m



CMYK

EVIDANCE 60

Shock absorbing dance floor for permanent and temporary usage

PRODUCT BENEFITS:

- non slip embossed surface
- 5,3mm foam backing - very high level of joint protection
- glass fiber reinforcement - dimensional stability
- surface protection - easy care

RECOMMENDED APPLICATION AREAS:

▷ DANCES

- ▷ BALLET
- ▷ CONTEMPORARY
- ▷ JAZZ
- ▷ AEROBIC
- ▷ FLAMENCO
- ▷ DANCE-HALLS
- ▷ MULTI-DANCE
- ▷ WARM-UP ROOMS
- ▷ DANCE STUDIOS

COLORS



EVIDANCE 60

EVIDANCE 60

SOLVENT FREE

GLASS FIBER REINFORCED

CLIP SYSTEM

PORTABLE PERMANENT

2m x 20m



CMYK

SHOWFLOOR

TECHNICAL PARAMETERS

	units	standards	product name								
			UNIFLOOR	EXPO	LAS VEGAS LUX	ACOUSTIC 48 UNI	DUETT	BROADWAY 17	BROADWAY 20	EVIDANCE 25	EVIDANCE 60
Construction			hetero- geneous	homo- geneous	heterogeneous			compact heterogeneous			
Total thickness	mm	EN 428	2.0	1.5	2.0	3.2	1.4	1.7	2.0	2.5	6.0
Wear layer thickness	mm	EN 429	0.35	1.5	0.35	0.70	0.50	0.70	0.70	0.70	0.70
Length of rolls	lm	EN 426	25	20	25	25	20	20	20	20	15
Width	m	EN 426	2.0	2.0	1.5	2.0	2.0	2.0	2.0	2.0	2.0
Total weight	kg/m ²	EN 430	1.3	1.75	1.3	2.7	1.7	2.1	2.7	3.5	3.5
Residual indentation	max.mm	EN 433	0.2	0.1	0.2	0.2	0.1	0.1	0.1	0.1	
	mm	EN 1516									0.1
Dimensional stability	max. %	EN 434	±0.2	±0.4	±0.2	±0.2	±0.2	±0.2	±0.2	±0.2	±0.2
Curling	max.mm	MSZ EN 428	8	8	8	8	8	8	8	8	8
Fire resistance	class	EN 13501-1	C _{fl} -s1	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1
	class	DIN 4102/ ÓNORM	B1	B1	B1	B1	B1	B1	B1	B1	B1
Abrasion group	group	MSZ EN 660-1	T	T	T	T	T	T	T	T	T
Abrasion resistance	max. m	MSZ EN 423	<250	<250	<250	<250	<250	<250	<250	<250	<250
Impact sound reduction	DL _{v,w} (dB)	EN ISO 717-2, 140-8				19±2					
Light fastness grade	grade	EN 20105 B02	>6	>6	>6	>6	>6	>6	>6	>6	>6
Chemical resistance		EN 423	✓	✓	✓	✓	✓	✓	✓	✓	✓
Slip resistance	class	EN 13893	DS	DS	DS	DS	DS	DS	DS	DS	DS
Castor chair resistance		EN 425	✓	✓	✓	✓	✓	✓	✓	✓	✓
Flexibility (diameter 20/40mm)	visual evaluation	MSZ EN 435	no change	no change	no change	no change	no change	no change	no change	no change	no change
Surface treatment			CLP	TECH surface	CLP	TECH surface	CLP	CLP	CLP	CLP	CLP
Antibacterial and fungicid treatment			grabosAN								
Seaming method			heat or cold weld								



SHOW.
EVENT.
STAGE.

